APP CRS	Rwy ldg	6995
021°	TDZE	54
	Apt Elev	54

RNAV (GPS) RWY 2
KAHULUI (OGG)(PHOG)

NA

Circling NA at night to Rwy 5.
GPS or RNP-0.3 Required. DME/DME RNP-0.3 NA.
For inoperative MALSR increase LNAV visibility ¼ mile.

MALSR

MISSED APPROACH: Climb to 2700 then climbing right turn to 6000 direct HARPO WP and hold.

ATIS	HCF APPROACH	MAUI TOWER★	GND CON	CLNC DEL	UNICOM
128.6	120.2 322.4 (NORTH) 119.5 225.4 (SOUTH)	118.7 (CTAF) L 279.6	121.9 279.6	120.6 290.5	122.95

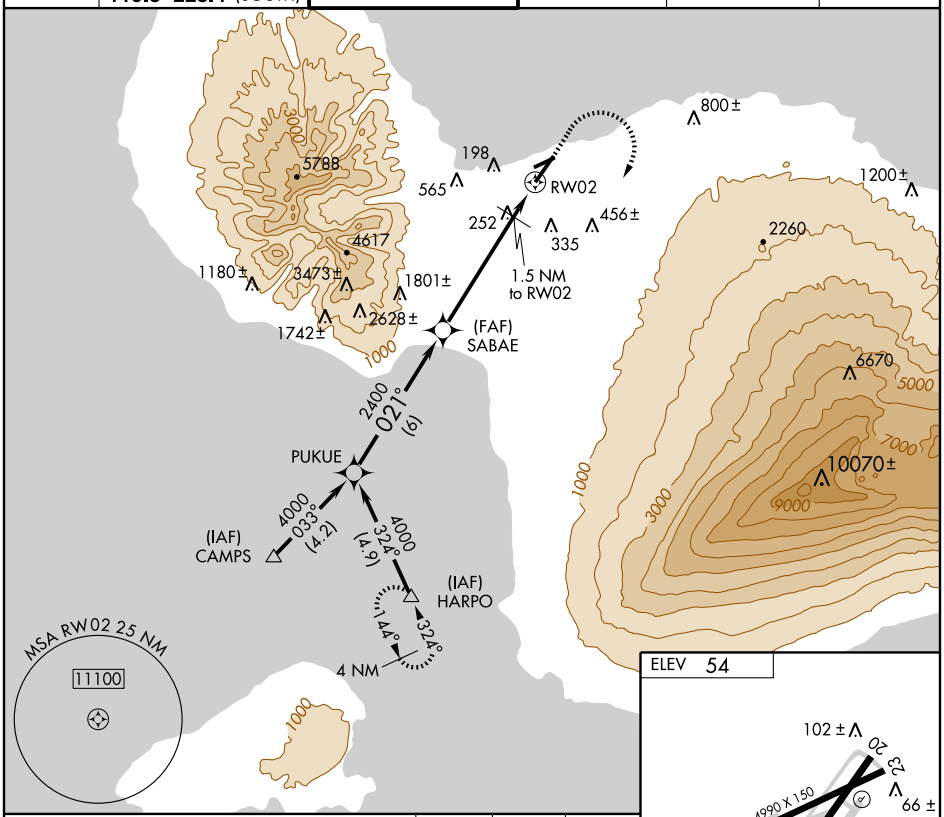

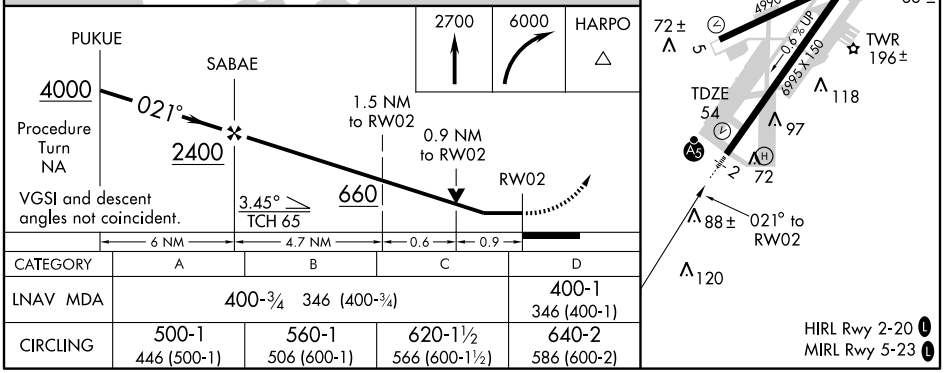

CATEGORY	A	B	C	D
LNAV MDA	400-¾ 346 (400-¾)			400-1 346 (400-1)
CIRCLING	500-1 446 (500-1)	560-1 506 (600-1)	620-1½ 566 (600-1½)	640-2 586 (600-2)

PAC, 05 JUN 2008 to 31 JUL 2008

PAC, 05 JUN 2008 to 31 JUL 2008