RNAV (GPS) RWY 17
SALT LAKE CITY INTL (SLC)

APP CRS	Rwy ldg	9596
166°	TDZE	4219
	Apt Elev	4227

For inoperative MALSR, increase LNAV Cat D to RVR 6000 and Cat E to 1½.
GPS or RNP- 0.3 required. DME/DME RNP- 0.3 NA.

MALSR

MISSED APPROACH: Climb to 10000 via 166° course to ZOMJE WP, then via 164° course to FFU VORTAC and hold.

ATIS	SALT LAKE CITY APP CON	SALT LAKE CITY TOWER			GND CON	
124.75 127.625	124.3 322.3	119.05 257.8 (Rwy 16L-34R)	118.3 257.8 (Rwys 14-32, 17-35)	132.65 336.4 (Rwy 16R-34L)	121.9 348.6 (Rwys 14-32, 17-35)	133.65 348.6 (Rwys 16L-34R, 16R-34L)

CLNC DEL 127.3 387.1

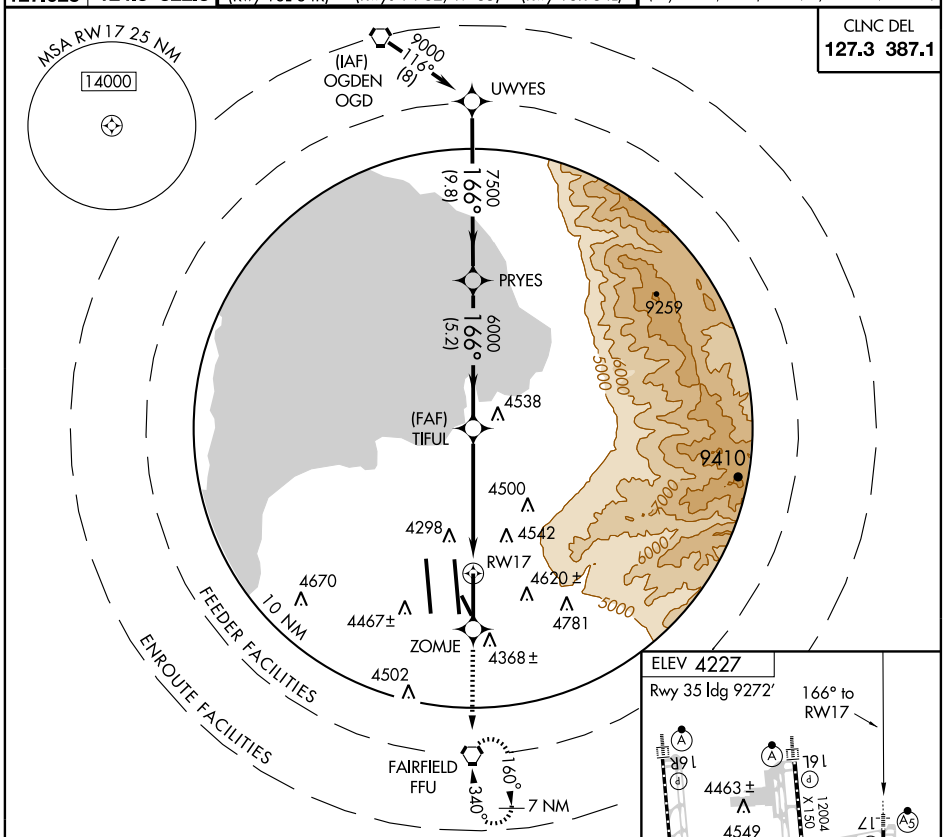

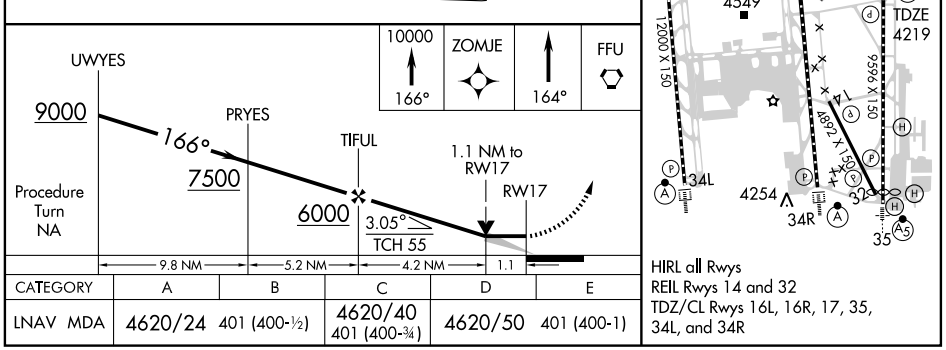

CATEGORY	A	B	C	D	E
LNAV MDA	4620/24 401 (400-½)		4620/40 401 (400-¾)	4620/50 401 (400-1)	

SW-4, 03 JUL 2008 to 31 JUL 2008
SW-4, 03 JUL 2008 to 31 JUL 2008