


SE-3, 03 JUL 2008 to 31 JUL 2008

ATIS
119.15
CLNC DEL
135.35
GND CON
121.8 (8L/8R/12/26L/26R)
127.5 (9/27/30)
348.6
MIAMI TOWER
118.3
MIAMI DEP CON
119.45

TAKE-OFF MINIMUMS:

- Rwy 8L: 300-1¼ or Standard with minimum obstacle climb of 382' per NM to 300', minimum ATC climb of 500' per NM to 520'.
- Rwy 8R: Standard with minimum ATC climb of 500' per NM to 520'.
- Rwy 9: Standard with minimum obstacle climb of 233' per NM to 1200', minimum ATC climb of 500' per NM to 520'.
- Rwy 12: Standard with minimum obstacle climb of 229' per NM to 1200', minimum ATC climb of 500' per NM to 520'.
- Rwy 26R/26L/27/30: Standard with minimum ATC climb of 300' per NM to 520'.

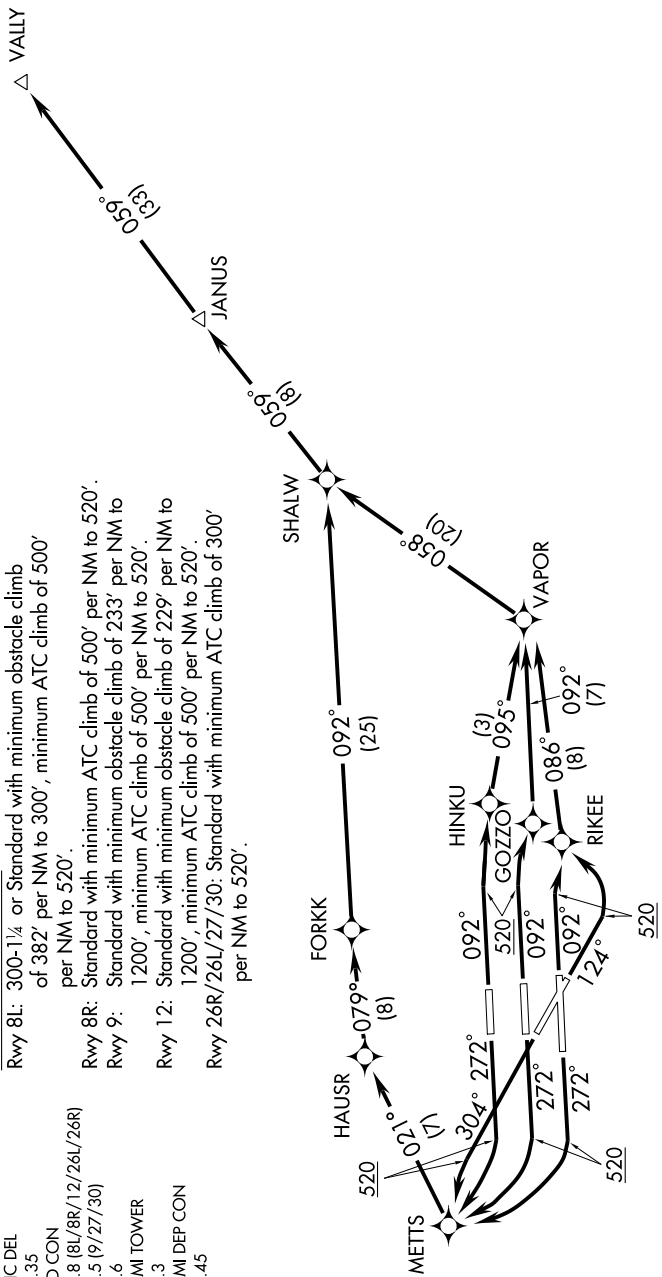

- NOTE: Turbojet aircraft accelerate to 250 KIAS, if unable, advise ATC.
- NOTE: Turboprop aircraft maintain maximum forward airspeed and climb rate.
- NOTE: DME/DME/IRU or GPS Required.
- NOTE: RADAR Required
- NOTE: RNAV 1.

(CONTINUED ON NEXT PAGE)

NOTE: Chart not to scale.