


MIAMI INTL (MIA)
MIAMI, FLORIDA

ATIS	
119.15	
CLNC DEL	
135.35	
GND CON	
121.8 (8L/8R/12	
127.5 (9/27/30)	
348.6	
MIAMI TOWER	
118.3	
MIAMI DEP CON	
119.45 290.325	

Rwy 8L: 300-1¼ or Standard with minimum obstacle climb of 382 feet per NM to 300, minimum ATC climb of 500 feet per NM to 520.
Rwys 8R, 9: Standard with minimum ATC climb of 500 feet per NM to 520.
Rwy 12: Standard with minimum obstacle climb of 229 feet per NM to 1200, minimum ATC climb of 500 feet per NM to 520.
Rwys 26R, 26L, 27, 30: Standard with minimum ATC climb of 300 feet per NM to 520.

NOTE: Turbojet aircraft accelerate to 250 KIAS, if unable, advise ATC.
NOTE: Turboprop aircraft maintain maximum forward airspeed and climb rate.
NOTE: RNAV 1.
NOTE: DME/DME/IRU or GPS required.
NOTE: Radar required.
NOTE: For non-GPS equipped aircraft, FLL VOR/DME must be operational for takeoff Rwy 26R, 26L, 27, 30.

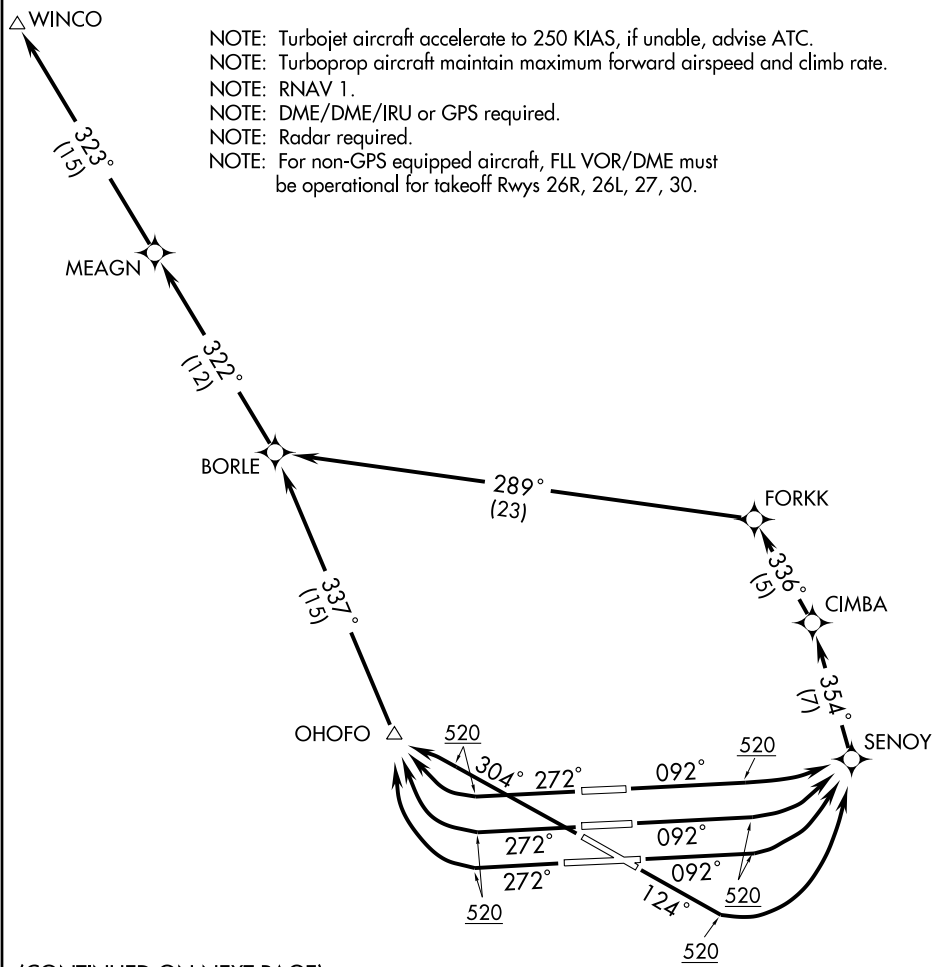

(CONTINUED ON NEXT PAGE)

NOTE: Chart not to scale.

MIAMI, FLORIDA
MIAMI INTL (MIA)

SE-3, 03 JUL 2008 to 31 JUL 2008

SE-3, 03 JUL 2008 to 31 JUL 2008