

SL-6039 (FAA)

DALLAS-FORT WORTH INTL (DFW)
DALLAS-FORT WORTH, TEXAS

SOLDO TWO DEPARTURE (RNAV)

ATIS 135.925	
CLNC DEL	
128.25 348.6	
GND CON	
121.65 121.8 (EAST)	
121.85 (WEST)	
DFW TOWER	
126.55 127.5 (EAST)	
24.15 134.9 (WEST)	
REGIONAL DEP CON	
118.55 290.35 (JETS)	

NOTE:

1. DME/DME/IRU or GPS Required.
2. RNAV 1.

TAKE-OFF MINIMUMS

Rwys 17C/R, 18L/R: Standard with a minimum ATC climb of 500' per NM to 5000.
 Rwys 35C: Standard with a minimum ATC climb of 536' per NM to 6500.
 Rwys 35L: Standard with a minimum ATC climb of 530' per NM to 6500.
 Rwys 36L/R: Standard with a minimum ATC climb of 500' per NM to 6500.
 Rwy 13L/R, 17L, 31L/R, 35R: NA-ATC request.


NARRATIVE ON FOLLOWING PAGE)

NOTE:
Take-off Rwy 35C/L, 36L/R:
Do not exceed 230K until MAVVS.
Take-off Rwy 17C/R, 18L/R:
Do not exceed 230K until TREXX.

NOTE: Chart not to scale.

SC-2, 03 JUL 2008 to 31 JUL 2008

NOTE: For jets requesting FL180 or above.
NOTE: RADAR required.

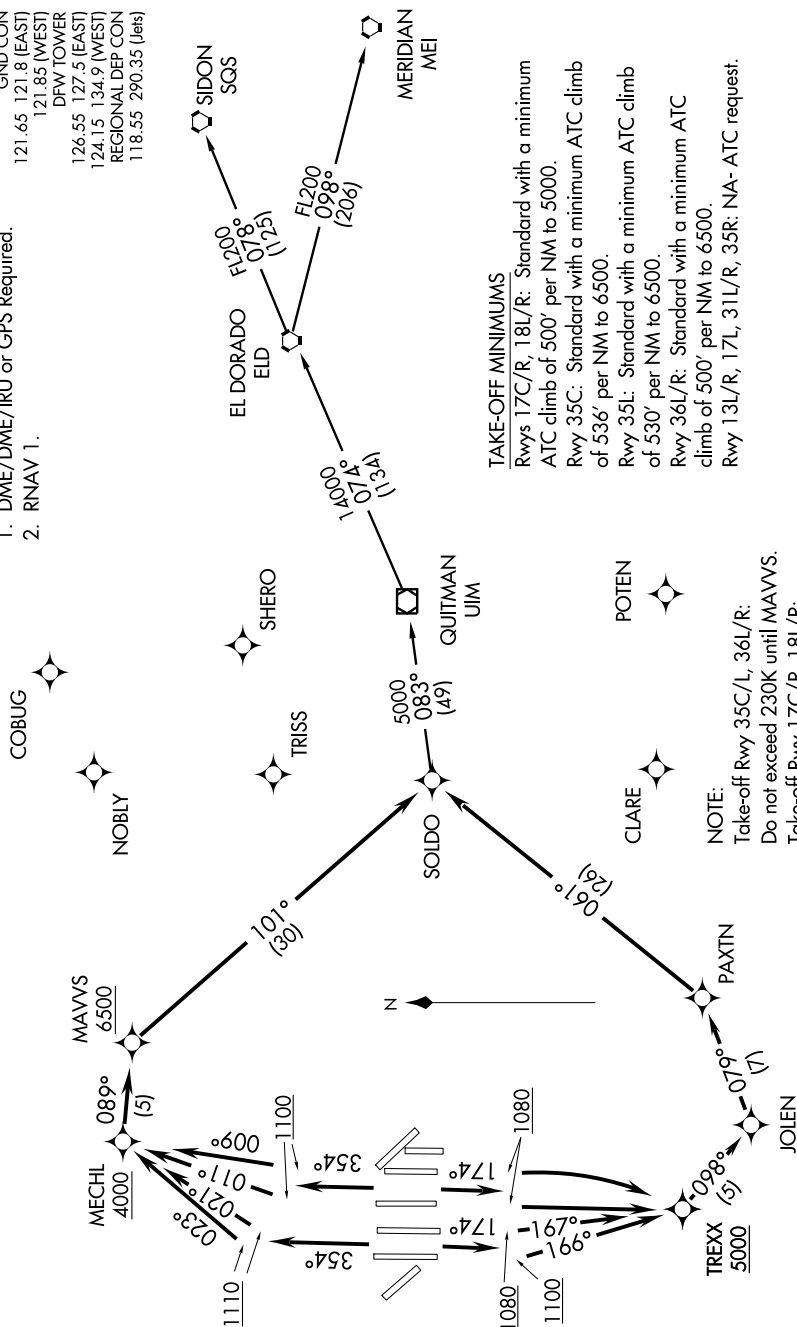

SOLDO TWO DEPARTURE (RNAV)
(SOLDO2.SOLDO) 08045

DALLAS-FORT WORTH, TEXAS
DALLAS-FORT WORTH INTL (DFW)