


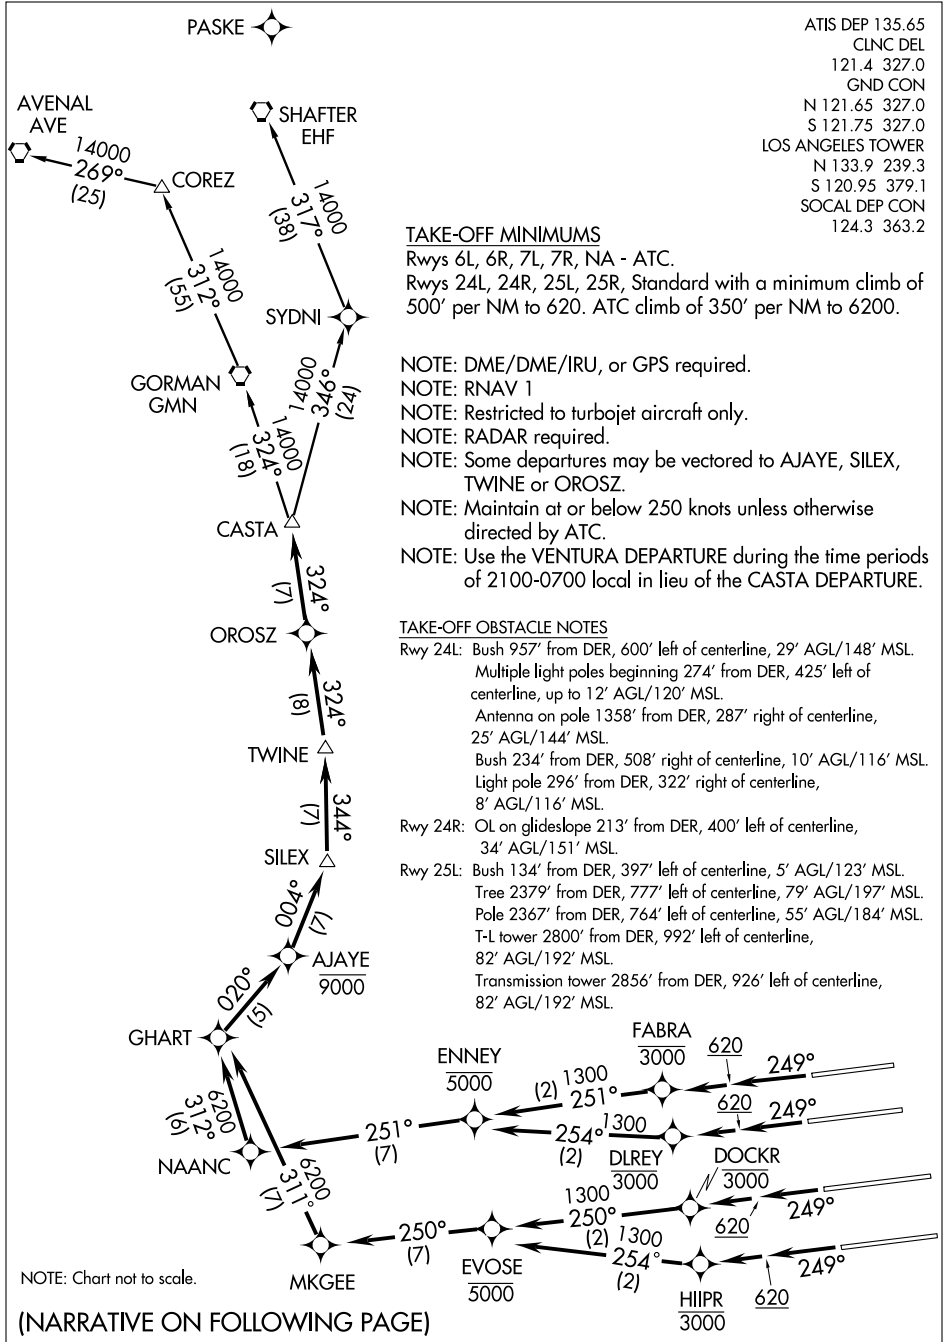

ATIS DEP 135.65
CLNC DEL
121.4 327.0
GND CON
N 121.65 327.0
S 121.75 327.0
LOS ANGELES TOWER
N 133.9 239.3
S 120.95 379.1
SOCAL DEP CON
124.3 363.2

TAKE-OFF MINIMUMS

Rwys 6L, 6R, 7L, 7R, NA - ATC.

Rwys 24L, 24R, 25L, 25R, Standard with a minimum climb of 500' per NM to 620. ATC climb of 350' per NM to 6200.

NOTE: DME/DME/IRU, or GPS required.

NOTE: RNAV 1

NOTE: Restricted to turbojet aircraft only.

NOTE: RADAR required.

NOTE: Some departures may be vectored to AJAYE, SILEX, TWINE or OROZ.

NOTE: Maintain at or below 250 knots unless otherwise directed by ATC.

NOTE: Use the VENTURA DEPARTURE during the time periods of 2100-0700 local in lieu of the CASTA DEPARTURE.

TAKE-OFF OBSTACLE NOTES

Rwy 24L: Bush 957' from DER, 600' left of centerline, 29' AGL/148' MSL.

Multiple light poles beginning 274' from DER, 425' left of centerline, up to 12' AGL/120' MSL.

Antenna on pole 1358' from DER, 287' right of centerline, 25' AGL/144' MSL.

Bush 234' from DER, 508' right of centerline, 10' AGL/116' MSL.

Light pole 296' from DER, 322' right of centerline, 8' AGL/116' MSL.

Rwy 24R: OL on glideslope 213' from DER, 400' left of centerline, 34' AGL/151' MSL.

Rwy 25L: Bush 134' from DER, 397' left of centerline, 5' AGL/123' MSL.

Tree 2379' from DER, 777' left of centerline, 79' AGL/197' MSL.

Pole 2367' from DER, 764' left of centerline, 55' AGL/184' MSL.

T-L tower 2800' from DER, 992' left of centerline, 82' AGL/192' MSL.

Transmission tower 2856' from DER, 926' left of centerline, 82' AGL/192' MSL.